



**REPHOUSE**  
www.rephouse.com

**Isodec™**

Timber & Laminated  
Floating Floor Underlay

# Isodec™ Insulation

*Quiet Underfoot*



**Sound  
Insulation**

**Anti  
Vibration**

**Made of  
Recycled Rubber**

**Thermal  
Insulation**

**Comfortable  
Underfoot**



Timber & Laminated  
Floating Floor Underlay



## Great Features

- Reduces Noise Transfer
- Environmentally Friendly
- Reduces Step Noise
- Reduces Insulation Costs
- Extra Comfortable Feel
- Quick Installation
- Permanently Resilient

Isodec™ is a premium underfloor protection layer providing optimum sound and vibration resonance absorption and thermal insulation properties.

Isodec™ is manufactured from polymerically bound recycled rubber particles and is supplied in rolls that are easy to handle and install. It is environmentally safe and is not hazardous to health.

Isodec™ exhibits excellent dynamic properties that produce outstanding benefits which outperform other underfloor systems.

## Physical Properties



Roll length (or to order)	25.0 m
Roll width	1.5 m
Thickness	2.0 to 15.0 mm
Tensile Strength	0.44 Mpa
Elongation at Break	52 %
Tear Strength	7 N
Rebound Elasticity	49 %
Compression Set (72 hrs/23°C)	12.9%
Heat Conductivity	0.19 W/mk

Sound  
Insulation

Anti  
Vibration

Made of  
Recycled Rubber

Thermal  
Insulation

Comfortable  
Underfoot



**Isodec**<sup>TM</sup>

Timber & Laminated  
Floating Floor Underlay

*Applications*

- Housing • Units • High Rise Apartments •
- Restaurants and Retail Outlets • Commercial Areas •




# Isodec™

Timber & Laminated  
Floating Floor Underlay



*Graph: Impact Isolation of Isodec™ Underlays for Timber Flooring*

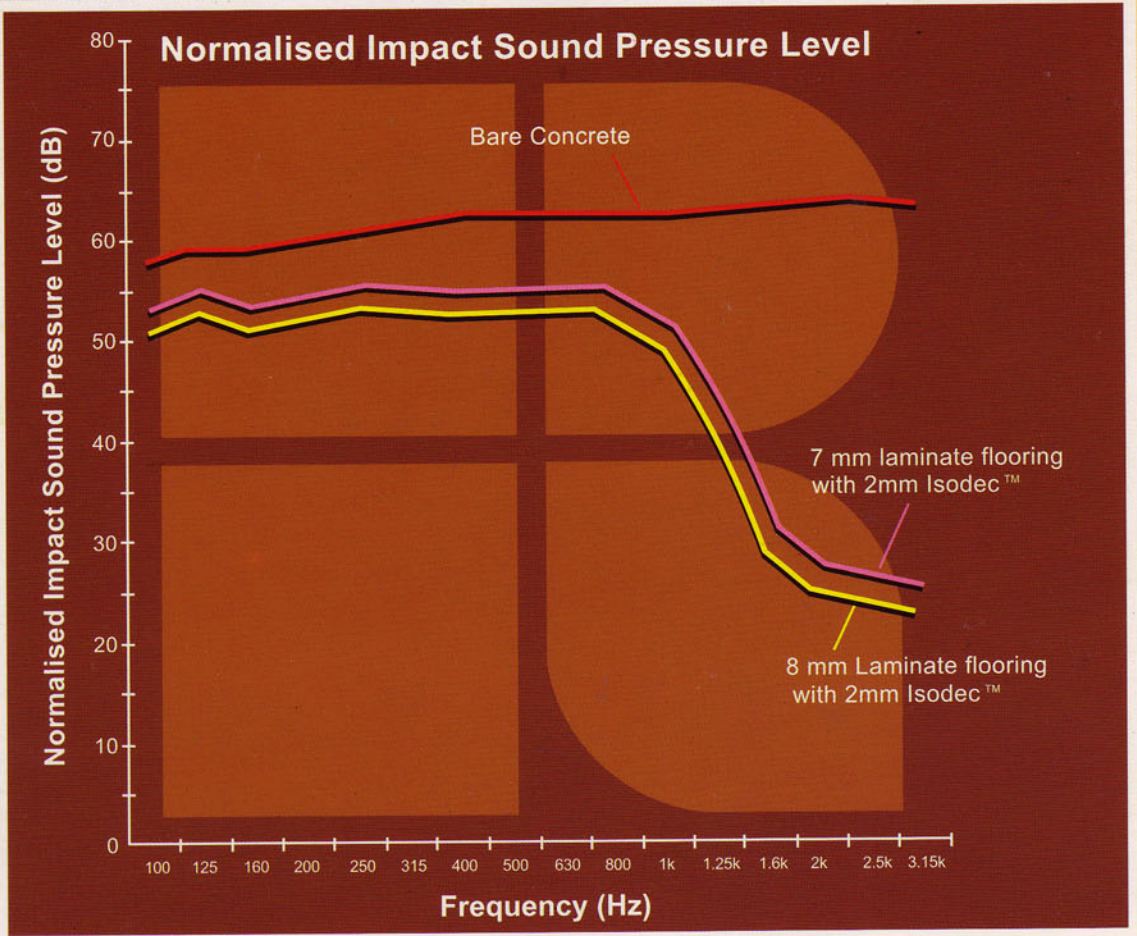

Distributor: