





RESILIENT FLOORING

High Impact Tile



REPHOUSE
www.rephouse.com



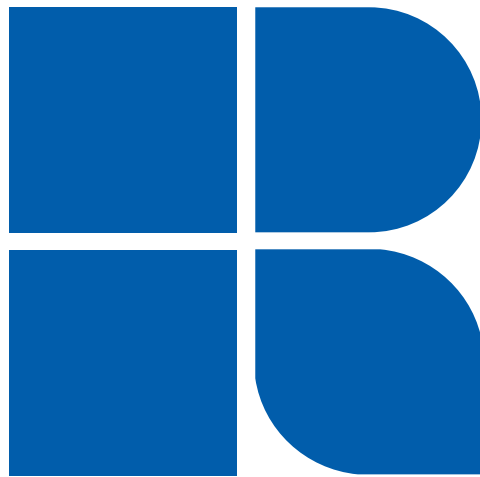

REPHOUSE
www.rephouse.com

SINCE
1985



HIGH IMPACT T



Feel the difference.

Neoflex™ High Impact Tile

These 20 mm to 75mm thick robust, resilient rubber tiles are installed in free weight areas and designed to attenuate the impact of heavy free weights that thinner surfaces cannot achieve. Neoflex™ High Impact Rubber Tiles provide superior sound and vibration insulation ensuring that areas below, around and above the gym remain quiet.



Neoflex High Impact Designer 675
Shangri-La Hotel Health Club
Kuala Lumpur, Malaysia





Neoflex High Impact Jazz 737
Kiara 9 Residency Fitness Gym
Mont Kiara, Malaysia





Neoflex High Impact Tile Royal Black
Pure Fitness
Singapore



Neoflex™ High Impact Rubber Tiles are supplied in various styles to suit your design.



Royal Red


Royal Top surface is made of ± 8 mm thick synthetic EPDM Rubber Top Layer that is molded to a recycled rubber base.

Standard Royal Colors


Royal Black



Royal Blue

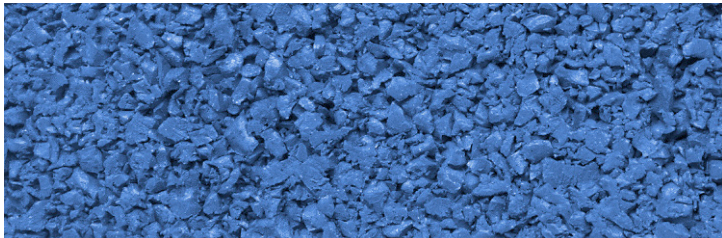


Royal Red

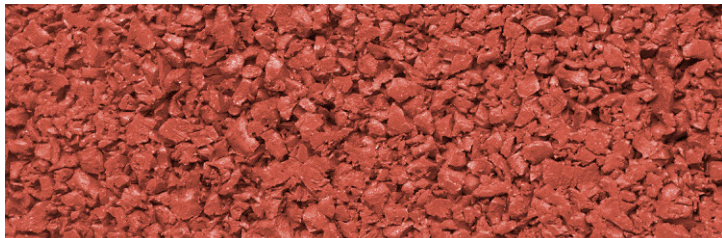


Royal Green




Royal Yellow

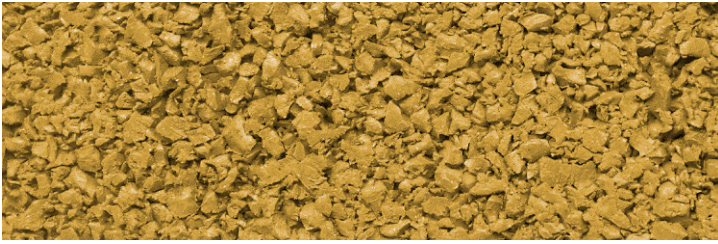


Royal Orange

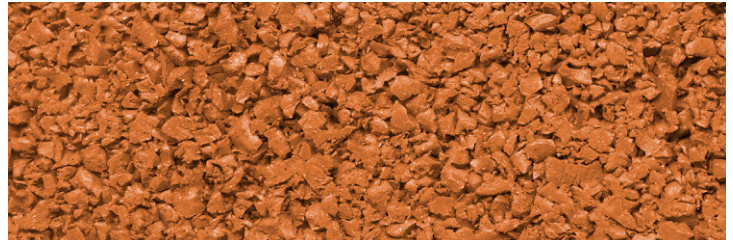

Royal Purple

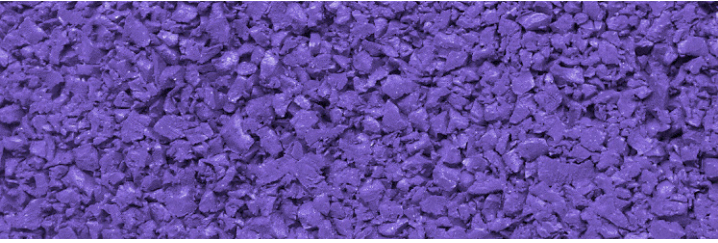

Royal Tele Gray

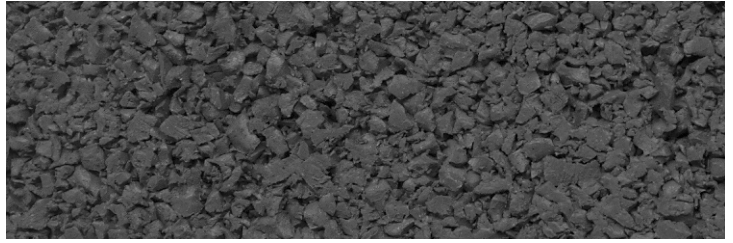



Designer 806


Designer 800 Top surface is made of a 4 mm thick Neoflex® 800 Series Rubber Sheet Top Layer that is molded to a recycled rubber base. Choose any Neoflex™ 800 Series flooring color for the top surface of your Neoflex™ High Impact Tiles.

Example Designer Colors


Designer 803




Designer 805

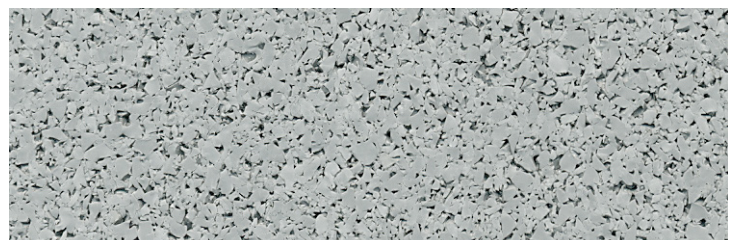

Designer 809

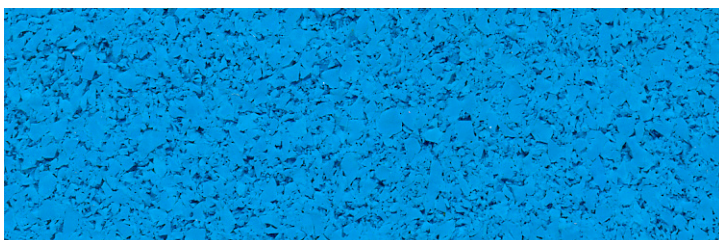




Designer 819

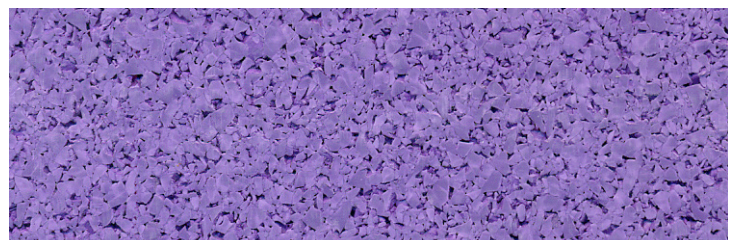


**Designer 600-008**

Designer 600 Top surface is made of a 4 mm thick Neoflex® 600 Series Rubber Sheet Top Layer that is molded to a recycled rubber base. Choose any Neoflex™ 600 Series flooring color for the top surface of your Neoflex™ High Impact Tiles.

Example Designer Colors

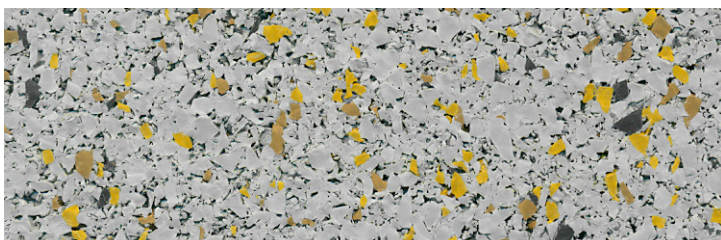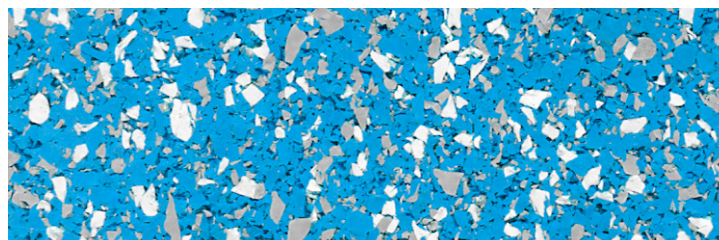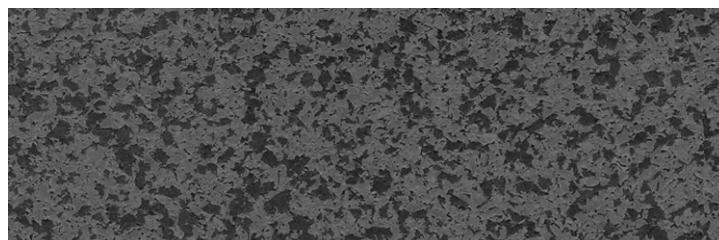Designer 603**Designer 675****Designer 633****Designer 600-020**

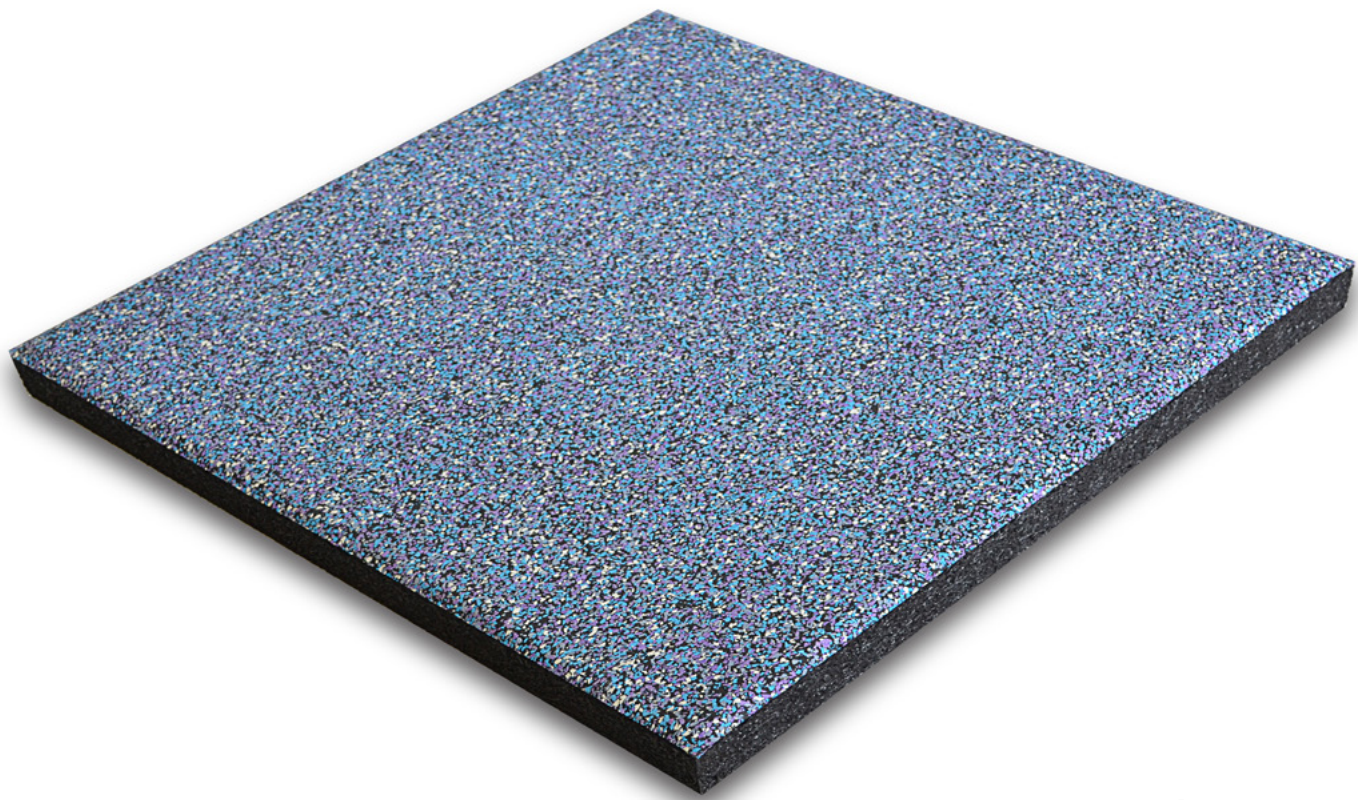


Jazz 742


Jazz 700 Top surface is made of a 4 mm thick Neoflex® 700 Series Rubber Sheet Top Layer that is molded to a recycled rubber base. Choose any Neoflex™ 700 Series flooring color for the top surface of your Neoflex™ High Impact Tiles.

Example Jazz Colors


Jazz 720

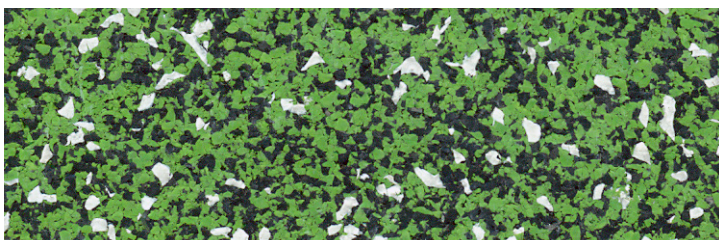


Jazz 700-006

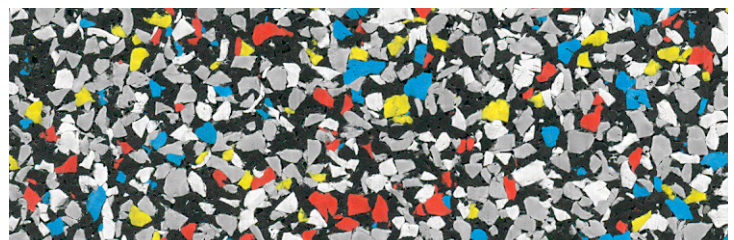

Jazz 744

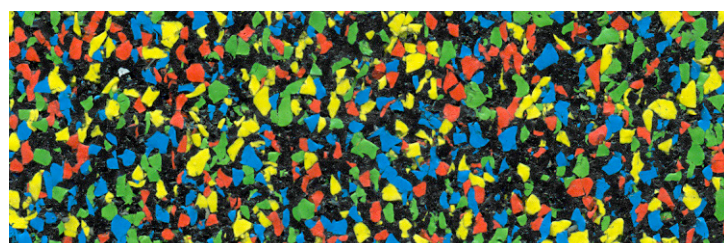

Jazz 750

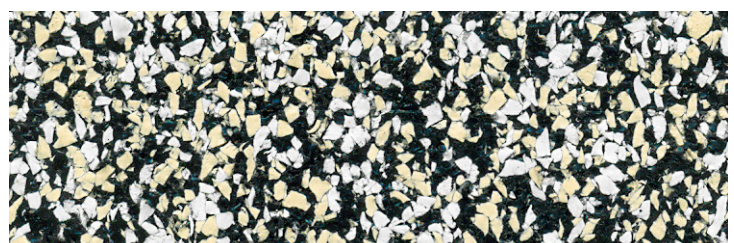




Star RS 101


Star Top surface is made of a 4 mm thick Neoflex® Reco Series Rubber Sheet Top Layer that is molded to a recycled rubber base. Choose any Neoflex™ Reco Series flooring color for the top surface of your Neoflex™ High Impact Tiles.

Example Star Colors


Star RS 105

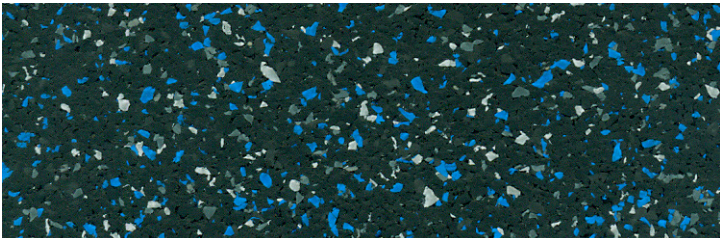


Star RL 205

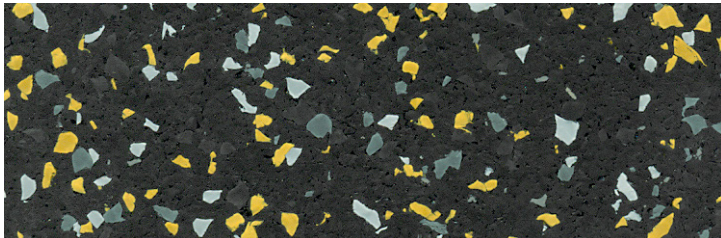


Star RXL 301

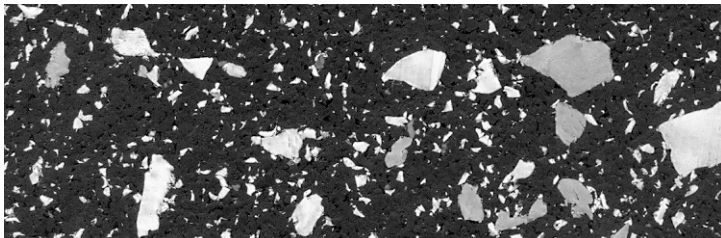

Star RXL 314

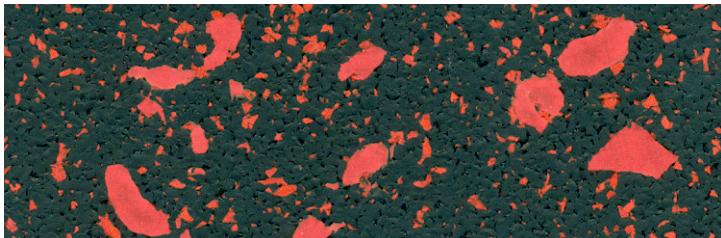


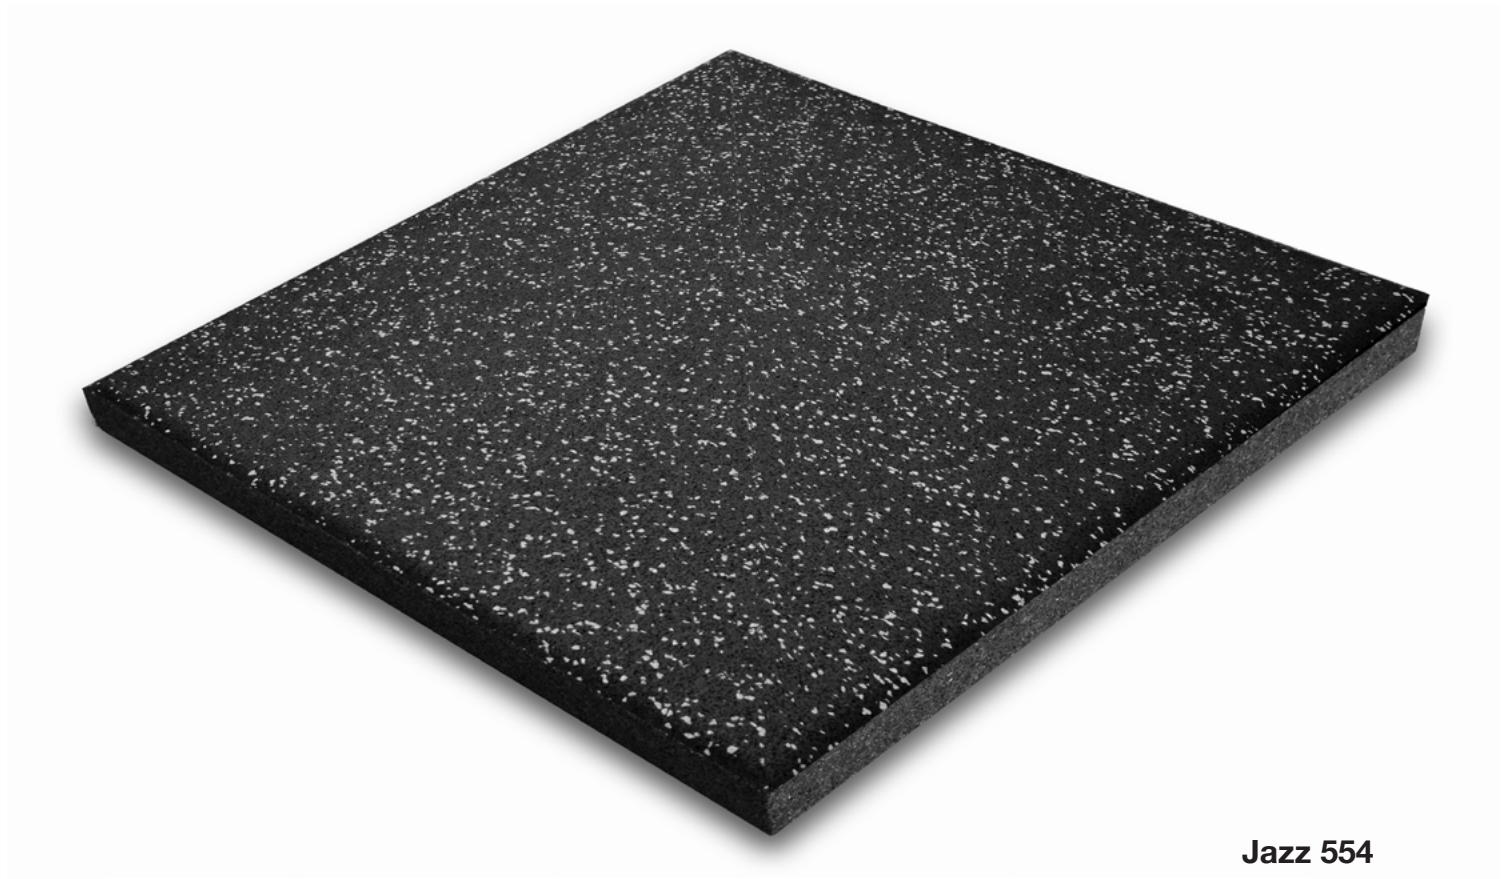


Jazz 500 Top surface is made of a 4 mm thick Neoflex® 500 Series Rubber Sheet Top Layer that is molded to a recycled rubber base. Choose any Neoflex™ 500 Series flooring color for the top surface of your Neoflex™ High Impact Tiles.

Example Jazz Colors


Jazz 503

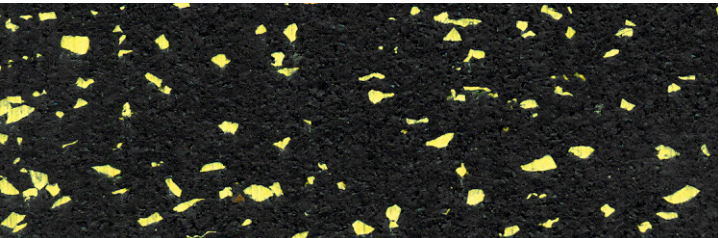


Jazz 504

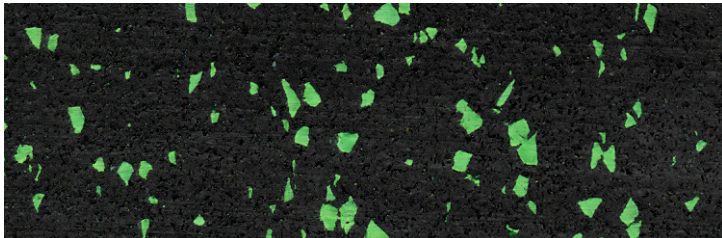

Jazz 519

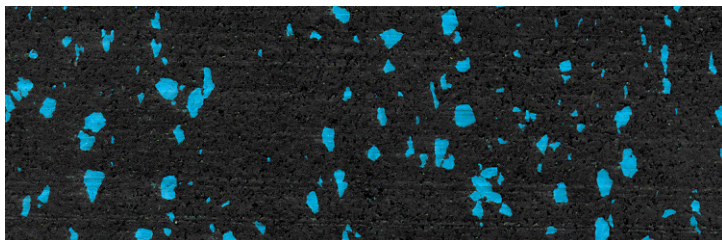

Jazz 553

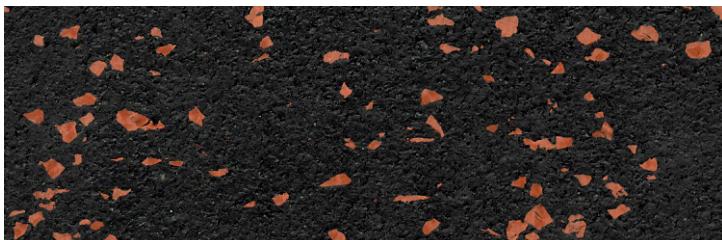




Galaxy 554


Galaxy Made of black recycled rubber, colored with sprinkled EPDM rubber granules on the top surface.

Standard Galaxy Colors


Galaxy 503

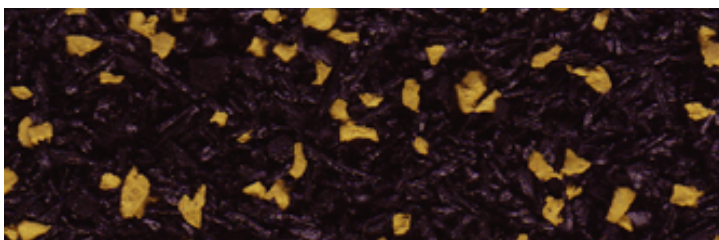


Galaxy 504

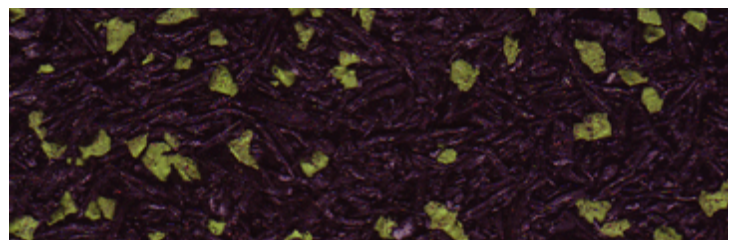

Galaxy 519

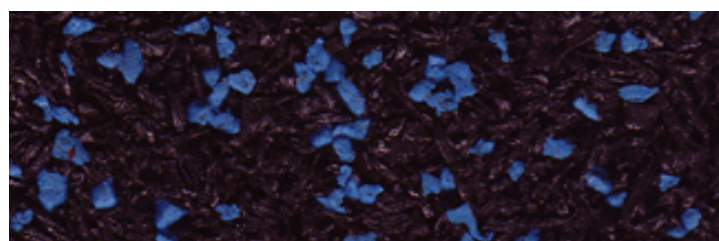

Galaxy 553

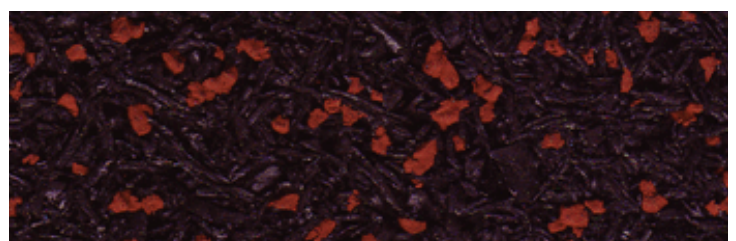



Basic Black

Basic

Made of black recycled rubber, colored with a pigmented polyurethane binder.

Standard Basic Colors

Basic Black




Basic Red



Basic Green



Neoflex High Impact Tile Specifications

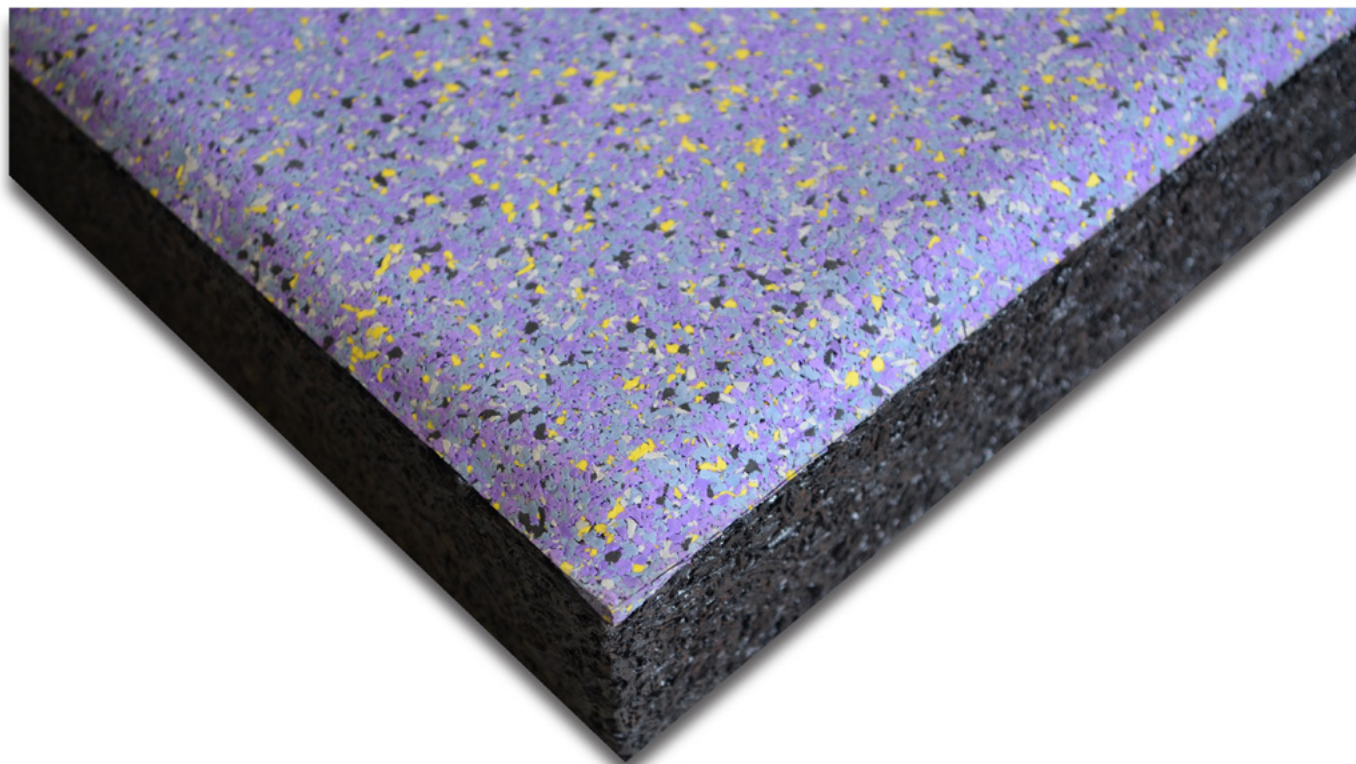

Description		Prefabricated Resilient Rubber Tile supplied in 3 x sizes composed of an EPDM rubber top surface supported by a recycled rubber base layer
Application		Free weight areas for indoor gyms and fitness areas
Benefit		Excellent impact attenuation with very good sound and vibration insulation
Thickness		20 mm - 75 mm
Sizes		505 mm x 505 mm 605 mm x 605 mm 1010 mm x 1010 mm
Traction	BS 7044	Good
Slip Resistance	BS 7044	Pass
Fatigue Resistance	BS 7044	No cracking or fracture
Spike Resistance	BS 7044 – up to 50,000 revs	Pass
Residual Indentation	BS 7044	0.64 mm – Pass
Color Transfer	BS 1006 A03	Pass
Flammability	EN 13501-1	Class Efl to Class Bfl-s1



Neoflex High Impact Designer 805
NL Leisure Centre
Tryst, Scotland



Unbounded Opportunities.

Combining great ideas, immaculate design, and sheer functionality to create innovative solutions, Rephouse floors are available in many varieties other than just Neoflex™. We provide flooring solutions for Commercial, Sports, Equine, Play & Recreational, Industrial and Ballistic applications. To find out more about these floors, contact your Rephouse partner, who will be happy to advise and provide you with complete information. Also, visit our web site at www.rephouse.com for the latest updates.



Rephouse Recycling.

Your Rephouse floor is the product of a comprehensive recycling concept. But what exactly does that mean in practice? It means that all the requirements of recycling are taken into account from the start, in the initial development of the floor. One example is careful material selection designed to preserve resources and to ensure efficient recycling compatible with the environment. Each Rephouse floor is designed and built for simple economic recycling after its long running life. Since 1990, we have been collecting the know-how required for this purpose, focusing on improving the high standards of quality, performance and environmental care we are known for. Please contact your Rephouse partner on all matters regarding your end-of-life floor. They will be happy to help.

