




12 mm [10+2]

**SEAMLESS POLYURETHANE
EQUINE FLOORING**

Product	Evoflex™ 12 mm [10 + 2]		
Description	Evoflex™ is a dual durometer in- & outdoor equine flooring system comprising of a prefabricated rubber base mat, pore sealer, wear coat and top coat. The finished surface is totally seamless ensuring optimum hygienic conditions.		
Adhesive for black rubber base mat	PU 88 2-component polyurethane adhesive		
Base mat	Prefabricated rubber base mat supplied in rolls to the specified thickness. Density 850 kg/m3		
Technical Data			Results - Surface System
		Unit	10+2
Shore Hardness	ASTM D 2240		68
Coefficient of Friction	DIN 18032-2		0.42
Abrasion Resistance	ASTM D 4060 Taber CS17/1000R	gr mm	0.039 0.05
Tensile Strength	DIN 18032-2	N/mm ²	3.53
Elongation at Break	DIN 18032-2	%	85
Flammability	DIN 51960		Class 1
Impact Resistance	DIN 18032-2	Nm	15
Remaining Indentation	DIN 18032-2	mm	0.08
Force Reduction	DIN 18032-2	%	27
Vertical Deformation	DIN 18032-2	mm	1.25

SEAMLESS POLYURETHANE

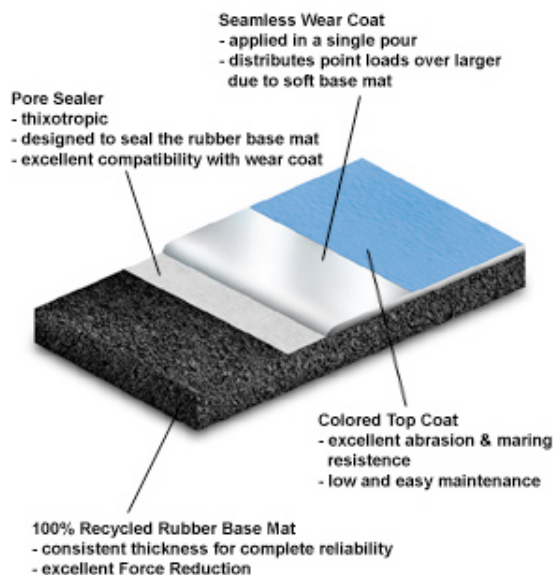

www.rephouse.com

© Rephouse

The above data, particularly the recommendations for applications and use of this product is based on our knowledge and experience. Due to varying conditions during applications, which are beyond our control, actual results may vary. Except for a wilful act, any liability based on such recommendations or any oral advice is hereby expressly excluded. This Technical data Sheet supersedes all previous editions.