



REPHOUSE

www.rephouse.com

Neoflex™

Swimming Pool Safety Flooring
also great for terraces, patios, walkways and building entrances



Innovative Safety Flooring

Neoflex™ stands out as an innovative, aesthetic and environmentally friendly choice amongst architects and designers. It is single-ply rubber safety flooring that is flexible and will not crack, peel or deteriorate. It is available in popular standard colours.

Durability, Safety & Comfort

In today's world, safety flooring is a functional necessity for commercial installations. Neoflex™ is a perfect choice for the most demanding of resilient pool surrounds, patios, terrace and other high traffic public areas. Since its introduction, Neoflex™ has satisfied customers around the world for a host of facilities requiring a naturally slip resistance floor. It is durable enough to withstand constant abuse and wear while providing comfort and safety under foot.

Tough Stuff

Neoflex™ is tough because it is made in such a way as to be nearly indestructible under the most severe service conditions. Made of the highest quality synthetic and recycled rubber, Neoflex™ has an international reputation for durability, resilience, anti-slip safety, comfort and design appeal. The high density sheet flooring is easy to install. The appearance is evocative of terrazzo style flooring, but its sound insulation, flexibility and durability are remarkable. You can count on Neoflex™ safety flooring for many years of trouble free use.

Great Features


- anti-slip
- resilient
- durable
- no cracking
- easy installation
- low maintenance
- sound deadening
- microbial treatment
- reduces risk of injuries

Ideal Locations








- swimming pool surrounds
- patios & terraces
- building entrances
- high traffic public areas
- exercise rooms
- fitness centres
- waiting rooms
- corridors
- aisles



QUICK REFERENCE DIMENSIONS

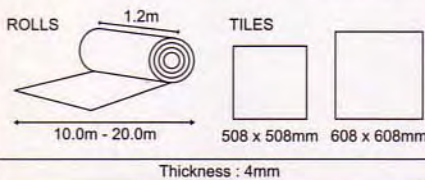

COLOURS



NEOFLEX™ IS TREATED WITH A MICROBIAL PRESERVATIVE TO ENSURE ADDED VALUE IN THE FORM OF LASTING FRESHNESS AND A LONGER USEFUL LIFE.



Treating Neoflex™ with a microbial agent inhibits the growth of micro-organisms, reducing the possibility of degradation. Anti microbial treatment is essential for flooring which is used in exterior applications and especially around swimming pools. Without it, they may discolour rapidly and their lifetimes may be short as to be commercially unacceptable. Only by inhibiting the growth of these micro-organisms can the integrity of the final product be preserved.



SPECIFICATION

Density	1,200kg/m ³
Shore A Hardness	60
Elongation at Break	48%
Tear Strength	9.7 N/mm
Tensile Strength	0.91 N/mm ²
Static Coefficient of Friction (wet/dry avg)	1.05
Taber Abrasion H18/ 1000	0.66g
Resilience	40%
Noise Absorption	13dB
Thermal Stability	-40°C ~ 100°C
Flammability	DIN 51960 Class 1
Stainability (Alcohol / Ammonia)	No Change

Installation
Neoflex™ is fully adhered to a sound, clean substrate with our recommended adhesive. Best result are obtained when experienced flooring technicians perform the product installation. A complete guide is available upon request.