







Feel the difference.

Neoflex™ High Impact Tile

These 45 mm (1.75") thick robust, resilient rubber tiles are installed in free weight areas and designed to attenuate the impact of heavy free weights that thinner surfaces cannot achieve. Neoflex™ High Impact Rubber Tiles provide superior sound and vibration insulation ensuring that areas below, around and above the gym remain quiet.














Neoflex™ High Impact Rubber Tiles are supplied in various styles to suit your design.



Royal Top surface is made of \pm 8 mm thick synthetic EPDM Rubber Top Layer that is molded to a recycled rubber base.

Standard Royal Colors

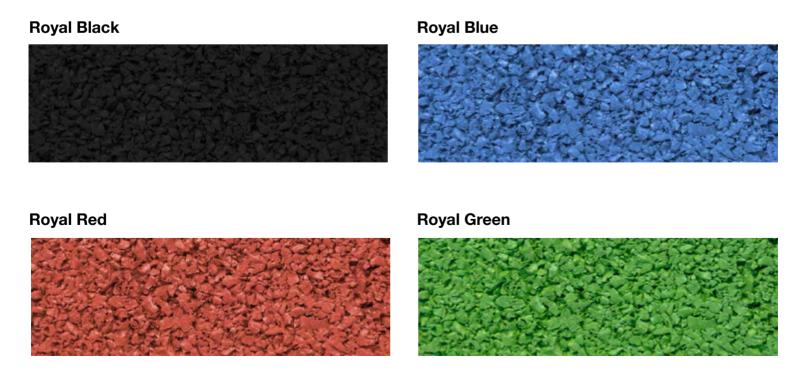


Royal Yellow




Royal Orange




Royal Purple

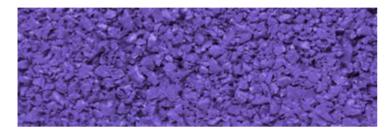

Royal Tele Gray

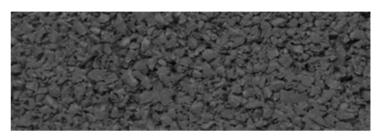

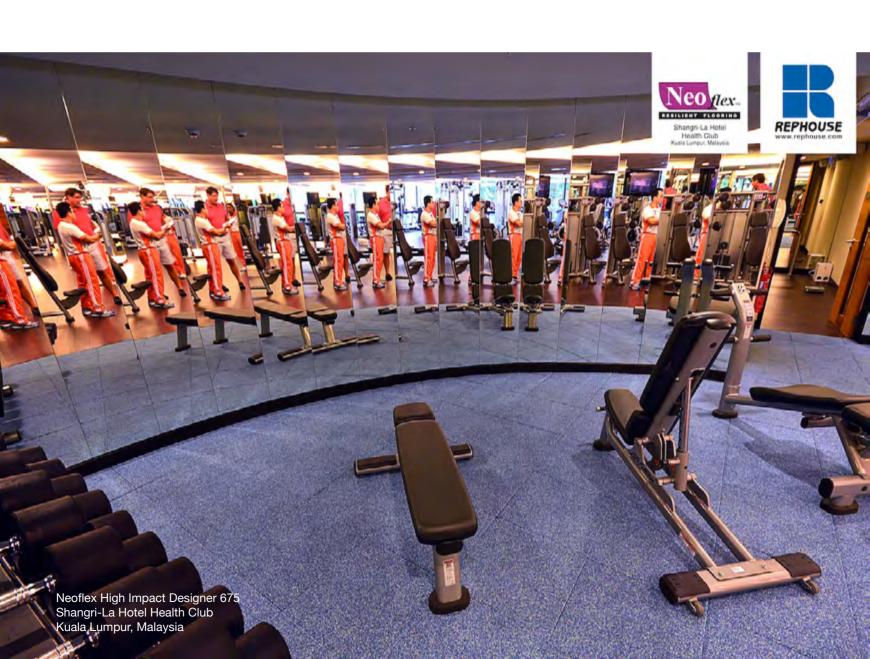



Designer


Top surface is made of a 4 mm thick Neoflex® 600 or 800 Series Rubber Sheet Top Layer that is molded to a recycled rubber base. Choose any Neoflex[™] 600 or 800 Series flooring color for the top surface of your Neoflex[™] High Impact Tiles.

Example Designer Colors


Designer 803




Designer 633

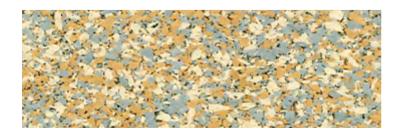


Designer 819

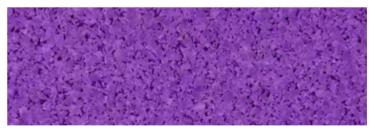


Designer 600-012

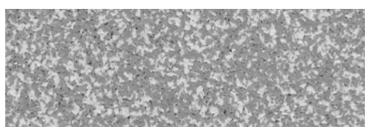

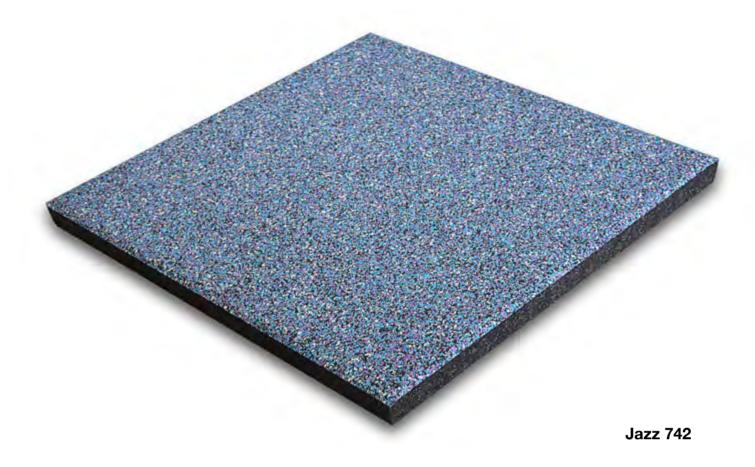

Jazz Top surface is made of a 4 mm thick Neoflex® 700 Series Rubber Sheet Top Layer that is molded to a recycled rubber base. Choose any Neoflex[™] 700 Series flooring color for the top surface of your Neoflex™ High Impact Tiles.

Example Jazz Colors

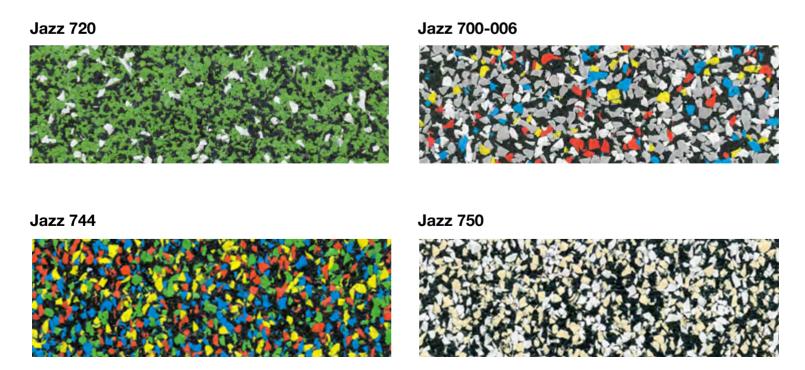




Galaxy Made of black recycled rubber, colored with sprinkled EPDM rubber granules on the top surface.

Standard Galaxy Colors

Galaxy 503

Galaxy 504

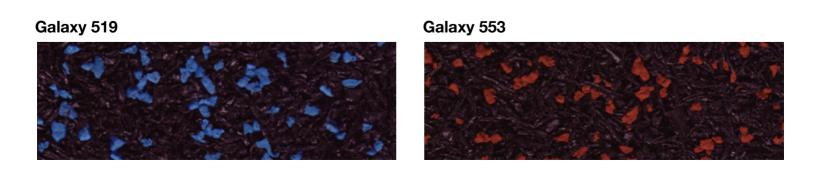




Basic Made of black recycled rubber, colored with a pigmented polyurethane binder.

Standard Basic Colors



Neoflex High Impact Tile Specifications

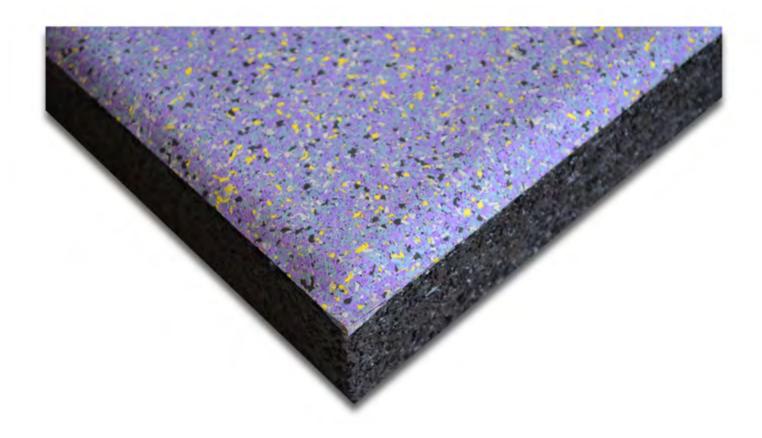

Description		Prefabricated Resilient Rubber Tile supplied in 3 x sizes composed of an EPDM rubber top surface supported by a recycled rubber base layer
Application		Free weight areas for indoor gyms and fitness areas
Benefit		Excellent impact attenuation with very good sound and vibration insulation
Thickness		45 mm (1.75")
Sizes		505 mm x 505 mm (20" x 20")
		605 mm x 605 mm (24" x 24")
		1010 mm x 1010 mm (40" x 40")
Traction	BS 7044	Good
Slip Resistance	BS 7044	Pass
Fatigue Resistance	BS 7044	No cracking or fracture
Spike Resistance	BS 7044	Pass
	 up to 50,000 revs 	
Residual Indentation	BS 7044	0.64 mm – Pass
Color Transfer	BS 1006 A03	Pass
Flammability	ASTM D2859	Class 1





Unbounded Opportunities.

Combining great ideas, immaculate design, and sheer functionality to create innovative solutions, Rephouse floors are available in many varieties other than just Neoflex™. We provide flooring solutions for Commercial, Sports, Equine, Play & Recreational, Industrial and Ballistic applications. To find out more about these floors, contact your Rephouse partner, who will be happy to advise and provide you with complete information. Also, visit our web site at www.rephouse.com for the latest updates.



Rephouse Recycling.

Your Rephouse floor is the product of a comprehensive recycling concept. But what exactly does that mean in practice? It means that all the requirements of recycling are taken into account from the start, in the initial development of the floor. One example is careful material selection designed to preserve resources and to ensure efficient recycling compatible with the environment. Each Rephouse floor is designed and built for simple economic recycling after its long running life. Since 1990, we have been collecting the know-how required for this purpose, focusing on improving the high standards of quality, performance and environmental care we are known for. Please contact your Rephouse partner on all matters regarding your end-of-life floor. They will be happy to help.





High Impact Tile